

VENTCROFT COMPACT

SPIRIT
CLASSIC



Full Feature • Vertical • External Sounder/Strobe

Fully integrated super slim external sounder, with the Spirit designed to conform to PD6662, EN50131 & BS4737 and Nacoss standards. All models are feature-rich and very competitive.



Make Your Dummy Box Look Real

Flashing LED



- Flash rate 1 per second
- Required 1 x 1.5V C-Cell Battery
- Provides minimum 18 months life
- Purchased Separately, Battery not provided



Screen Printing Available

Features

- Full Function Timed SAB/SCB
- Extra Loud Piezo Sounders
- 2 Watt Xenon Strobe Tube
- Twin High Bright Status Leds
- Rechargeable Backup Battery
- Front, Back & Cable Anti-tamper
- Trigger Wire Monitor Option
- Complies to PD6662, EN50131-1 & BS4737
- Engineer Sounder Hold-off Facility
- Global Compatibility Options



www.ventcroft.co.uk

CE



VENTCROFT COMPACT

TWIN PIEZO
117dB@ 1M

SINGLE PIEZO
114 dBA@ 1M



Compact Classic



Features

When it comes to price, the Compact Classic is hard to beat. With its robust ABS cover and back plate it makes this feature rich external sounder the perfect choice for a budget/ domestic installation.

Specification

Cover:	Robust ABS	} 3mm wall section
Backplate:	Robust ABS	
Lens:	Polycarbonate	
Electronics Case:	Polycarbonate	
Tamper:	Screw, Back & Cable	
Cover Colours:	White, Red & Yellow	
Lens Colours:	Blue, Opal, & Amber	

Global Compatibility

NT - Negative Trigger/Tamper ,Entry Level

Selectable Functions


SIREN SELECT	TIMER SELECT
Sweep	A 15 minutes
Hi - Lo	T 5 seconds

SOUNDER MODE SELECT

SAB Self Activating Bell draws sounder current from the onboard battery only if hold-off voltage is removed.

SCB Self Contained Bell is ideal for secondary sounders as the sounder current is always drawn from the onboard battery.

Dimensions

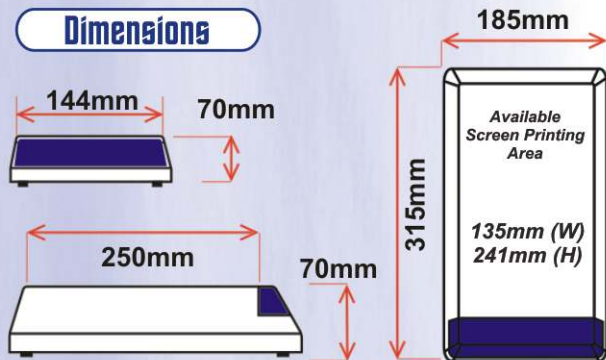

Screen Printing
Screen printing is available on all models with free logo design (min.qty 40)

Available in a variety of colours



Compact Spirit



Features

The Compact Spirit is an ideal choice for those requiring an external sounder to meet the NACOSS standard requirements and both EN50131 & BS4737. Proven to be reliable, well constructed and competitively priced makes this a nations favorite.

Specification

Cover:	Polycarbonate	} 3mm wall section
Backplate:	Polycarbonate	
Lens:	Polycarbonate	
Electronics Case:	Polycarbonate	
Tamper:	Screw, Back & Cable	
Cover Colours:	White, Red & Yellow	
Lens Colours:	Blue, Opal, & Amber	

Global Compatibility

ST - Selectable Trigger/Global Tamper

Selectable Functions

LED SELECT	SIREN SELECT	TIMER SELECT
ALT LEDs alternate from side to side	Sweep	A 15 minutes
CONST Both LEDs constantly illuminated.	Hi-Lo	T 5 seconds
	Whoop	
	TAMPER SELECT	TRIGGER SELECT
	+ Positive	+ Positive
	- Negative	- Negative

SOUNDER MODE SELECT

SAB Self Activating Bell draws sounder current from the onboard battery only if hold-off voltage is removed.

SCB Self Contained Bell is ideal for secondary sounders as the sounder current is always drawn from the onboard battery.

Specification

Strobe Voltage	13.8V Nominal (15V max)
Strobe Current	100mA Nominal (150mA max)
Strobe Tube	2 Watt Linear
Strobe Flash Frequency	60-120 per minute
Hold off Voltage	13.8V Nominal (10V Min, 15V Max)
Hold off Current	Alternating LEDS - 35mA (45mA max) Constant LEDS - 55mA (70mA max)
Sounder Current	1 Piezo -100mA (150mA max) 2 Piezo -250mA (350mA max)
Sounder Output	1 Piezo -114dB@ 1M 2 Piezo -117dB@ 1M
Battery Voltage	6V
Battery Charge Time	24 hours
Battery Charge Current	Trickle -5.5mA (nominal) From Discharged -15mA max
Product Coating	HPA MIL-1-46058C
Warranty	2 Years

Ventcroft Ltd. Goddard Road, Astmoor Industrial Estate, Runcorn,
Cheshire WA7 1NQ, Great Britain. Tel: +44 (0)1928 581098, Fax: +44(0)1928 581099



www.ventcroft.co.uk



Ventcroft and the Ventcroft Device are Registered Trade Marks of Ventcroft Ltd.

E&OE

VA34 Version:3.2 Issued 01/05/2009